



# VSL150-HW

Industrial Touch Screen Monitor Manual v1.6



[www.short-circuit.com](http://www.short-circuit.com)



## Contents

- README/Quick Installation
- Packing List/Specifications
- Ports
- Panel Buttons
- Changing Modes (HDMI/VGA)
- On Screen Display (OSD)
- Touch Screen Driver Installation
- Troubleshooting
- Support

## README

- Please visit [www.short-circuit.com/drivers](http://www.short-circuit.com/drivers) for the latest touch screen drivers
- To quickly change the video input mode, press the **VGA/HDMI** button

## Quick Installation

1. Connect the power to the monitor using the AC-DC adapter or power cord.
2. Connect the video cable (either VGA or HDMI) from the monitor to your computer.
3. Set the monitor's video mode to either VGA or HDMI based on which video cable you have connected.
4. Connect the USB cable from the monitor to your computer for touch screen functionality.
5. Install the touch screen driver on your computer using the included disk or download the drivers from <http://www.short-circuit.com/support/drivers.html>


## Packing List

1	VSL150-HW LED Monitor	
1	power cable	
1	VGA cable	
1	HDMI cable	
1	USB cable	
1	Driver Disc	also downloadable -- please see the touch screen driver installation section

## Specifications

Panel Size	15.4 inches
Aspect Ratio	16:10
Backlight Unit	LED, edge-light, replaceable
Resolution (native)	1280 x 800 pixels
Touch Panel	4-wire resistive
Brightness	350 cd/m <sup>2</sup>
Contrast	800:1
Input Signal	VGA, HDMI
Color System	PAL/NTSC, PAL/SECAM
Size (L x W x H)	13.6x8.8x2.1 (in) / 34.5x22.5x5.5 (cm) (LxWxH) Screen: 12.8 x 8.1 (in) / 32.5 x 20.7 (cm)
Mounting	VESA 75/100 mounting holes

## Ports

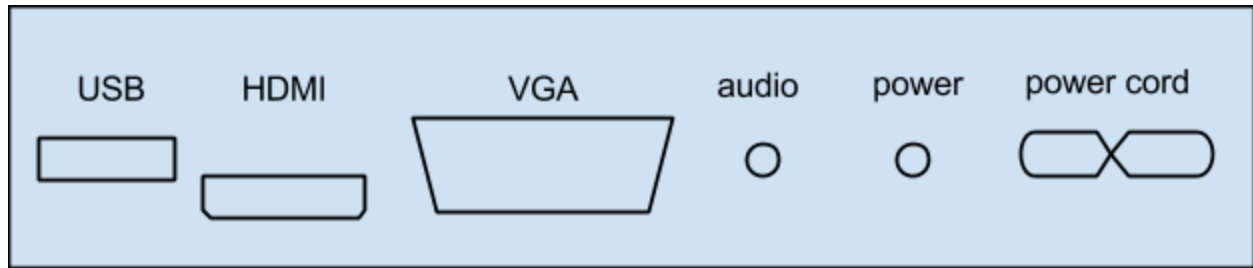

USB	USB input for touch screen functionality
HDMI	HDMI connector for HDMI input
VGA	VGA connector for VGA input
audio	no function
power	12V power jack connector

## Panel Buttons

Power	Switches the monitor on and off LED bulb will turn green for on, and turn red for off. The LED bulb will turn off when there is no power.
CH- (Select)	For selecting/changing OSD Settings
MENU	Display the OSD (available only in VGA or HDMI modes) Also returns to the previous menu
CH+ (Enter)	For selecting/changing OSD Settings
VGA/HDMI	Switch between different modes (HDMI/VGA)

## Changing Modes

Press the **VGA/HDMI** button

## On Screen Display (OSD)

The on screen display (OSD) displays settings for your monitor. It can be activated by pressing the **MENU** button.

To select a menu item, use the **CH-** button (Select). To enter a menu item, use the **CH+** button (Enter). Press the **MENU** to go back one level.

<b>Menu</b>	<b>Settings</b>	<b>Description</b>
<b>Picture</b>		
Picture Mode	Vivid/Standard/Gentle/User	Preset Picture Settings
Brightness	0-100	To adjust these settings, picture Mode Must be in <b>User</b> mode)  Use CH-/CH+ to change the brightness and then press MENU to set it.
Contrast	0-100	
Saturation	0-100	
Sharpness	0-100	
Color Temperature	Warm/Normal/Cool	
<b>Sound</b>	Not Applicable for the VSL150-HW	

<b>Screen</b>		
Auto		Automatically configure the various display settings on the monitor based on the VGA/HDMI connection
Clock	0-100 (default: 50)	
Phase	0-60 (default: 45)	
H Position	0-100 (default: 50)	Horizontal Position of screen
V Position	0-100 (default: 50)	Vertical Position of screen
<b>Setup</b>		
OSD Language	English/Chinese	OSD language
OSD Setting	OSD Timeout/Transparency	
OverScan	On/Off	In HDMI mode only. Increases the edge of the display
Reset		Reset monitor to factory settings

# Touch Screen Driver Installation

For the latest drivers and instructions please visit:

<http://www.short-circuit.com/support/drivers.html>

## Troubleshooting Guide

No Display	<ul style="list-style-type: none"><li>● Check power -- LED indicator should be on</li><li>● Check all the cables</li><li>● Check the display mode - it must match the connected video cable</li><li>● Check computer resolution - some resolutions may be incompatible with the monitor</li></ul>
Touchscreen not working	<ul style="list-style-type: none"><li>● Make sure to install the correct touch screen drivers</li><li>● Make sure the USB cable is connected to both the computer and the monitor</li><li>● Temporarily unplug any unnecessary USB devices and reboot</li></ul>

## Support

For technical support, please visit

[www.short-circuit.com](http://www.short-circuit.com)

or email us at [support@short-circuit.com](mailto:support@short-circuit.com)